




SET-UP STEPS

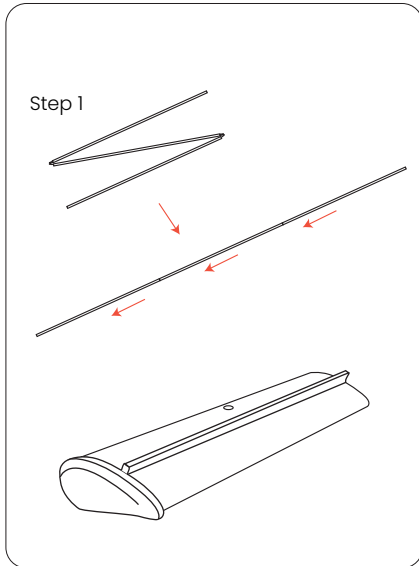

Step 1: Extend the pole.

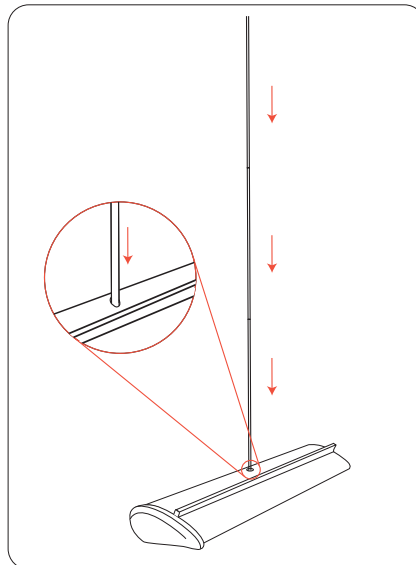


Step 2: Insert the pole into the hole at the back of the base.

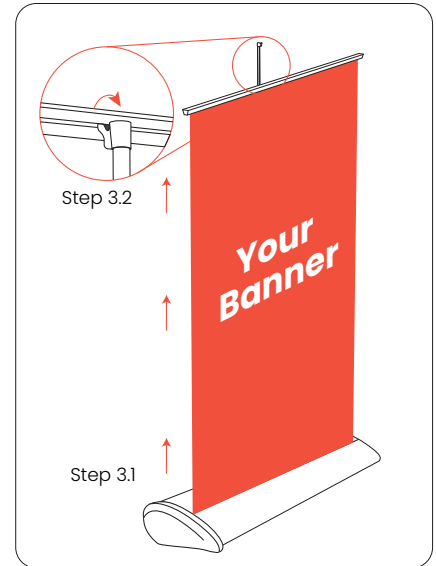


Step 3.1: Slowly pull the banner up from the base.
Step 3.2: Attach the header bar to the top of the pole.


DELUXE RETRACTABLE BANNER REPLACEMENT STEPS

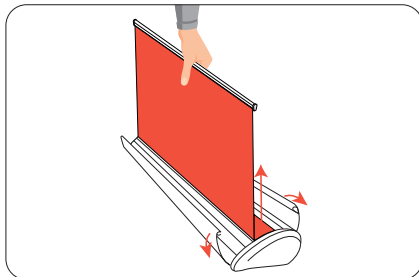


Step 1: Pull the insert out and pry open the base panels.

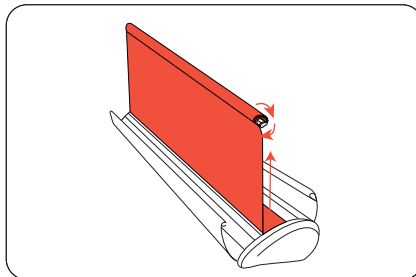


Step 2: Roll the print around the top clamping rail.

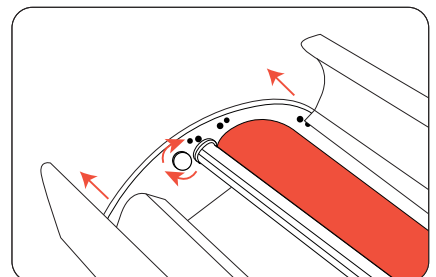


Step 3: Remove the gray knob and silver plate from either side of the base.

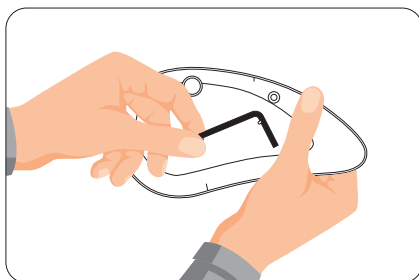


Step 4: Take out the tool found inside the silver plate.

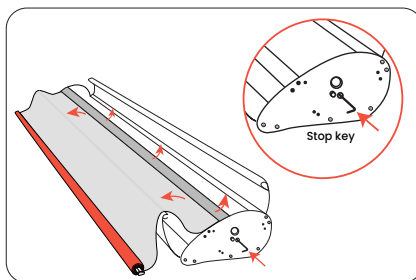


Step 5: Insert the tool into the base hole and pry open the base clamp to release the print.

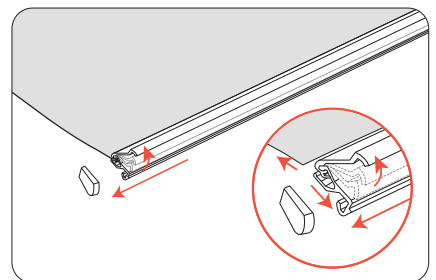


Step 6: Remove the end caps from the top rail and pull out the old print.

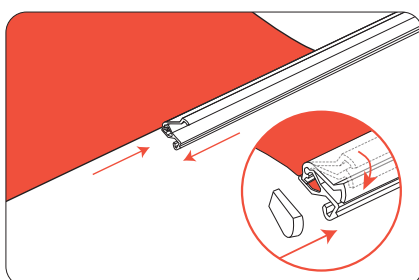

Step 7: Attach the top rail to the new print and close the clamp firmly.

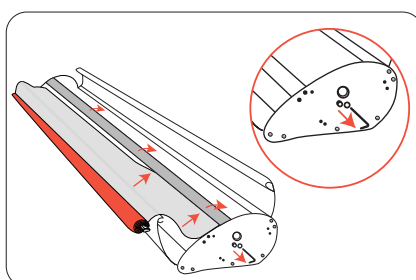

Step 8: Insert the new print into the base and lock it.

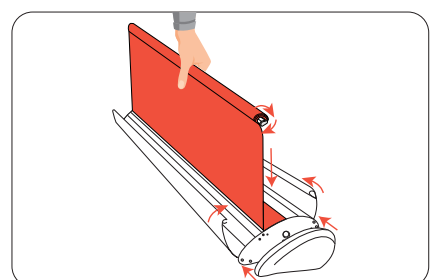

Step 9: Close panels, reattach the silver plates and knob, and test the print.